





2MP Varifocal Bullet Network Camera

Panasonic cameras are designed to provide high security, ensuring the safety of customers in their homes, shops, and offices. Equipped with advanced intelligence features, these cameras detect line crossings, abandoned or missing objects, and more, enhancing user security and peace of mind. Moreover, the cameras guarantee customer privacy through an advanced encryption algorithm and the Region of Interest (ROI) feature built into the camera.

Key Features

- H.265+/H.265/H.264+/H.264/MJPEG coding
- Max. resolution: 2MP (1920×1080)
- ICR auto switch, true day/night vision
- Starlight
- 3D DNR, WDR, HLC, BLC, smart IR, etc.
- ROI coding
- 30~50m IR night view distance
- Built-in micro SD card slot, up to 256GB
- DC12V/PoE power supply
- Weather protection up to IP67
- Support three streams
- Support P2P function
- Support Smart Motion Detection
- Advanced Intelligence
- Redundant system backup

Appearance

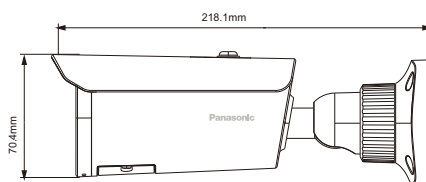

Optional Accessories

Mount Bracket



PM-YH0103-W
Junction box



PM-YH0104-W
Junction box



PM-YH0301-W
Junction box



PM-YH0301-W+
PM-YZJ0501-W
Pole Mount Bracket



PM-YH0301-W+
PM-YZJ0601-W
Corner Mount Bracket



PM-YH0301-W+
PM-YZJ0810-W
Ceiling Mount Bracket

Specifications

Camera				
Image Sensor	1/2.8 "CMOS			
Image Size	1920×1080			
Electronic Shutter	1/1s ~ 1/100000 s			
Iris Type	Fixed Iris			
Min. Illumination	0.005 lux @F1.6, AGC ON; 0 lux with IR			
Lens	2.8~12mm@F1.4,H.FoV: 102.5°~33.6°; V.FoV: 4.3 °~19°; D .FoV: 121 °~ 37.8 °			
Focus	Motorized			
Lens Mount	Ø14			
Day&Night	ICR			
Wide Dynamic Range	120dB			
Back Light Compensation (BLC)	Yes			
High Light Compensation (HLC)	Yes			
Digital Noise Reduction (DNR)	Yes			
S/N ratio	≥50dB			
Angle Adjustment	Pan: 0°~360°; Tilt:0°~90°;Rotation: 0°~360°			
Image				
Video Compression	Main stream: H.265+/H.265/H.264+/H.264 Sub/thirdstream:H.265+/H.265/H.264+/H.264/MJPEG			
H.265 Compression Standard	Main Profile@Leve4.1 High Tier			
Resolution	1080P(1920×1080), 720P(1280×720), D1, 640× 480, 480× 240, CIF			
Main Stream	60Hz: 1080P/720P(1~30fps); 50Hz: 1080P/720P(1~25fps)			
Sub Stream	60Hz: D1/640×480/CIF(1~30fps);50Hz: D1/640×480/CIF(1~25fps)			
Third Stream	60Hz: D1/480×240/CIF(1~30fps);50Hz: D1/480×240/CIF(1~25fps)			
Bit Rate	128 Kbps~6 Mbps			
Bit Rate Type	VBR/CBR			
Image Settings	ROI, Saturation, Brightness, Hue, Contrast, Wide Dynamic, Sharpness, Image Mirror, Image Flip, NR, etc. adjustable through client software or web browser			
Audio Compression	G711A/U			
Region of interest (ROI)	Each ROI to be configured separately			
Interfaces				
Network	RJ 45 10M/100M self-adaptive Ethernet port			
Audio	1CH audio input; 1CH built-in MIC			
Storage	Built-in micro SD card slot, up to 256GB			
Reset	Yes			
DORI Distance				
Lens	Detect	Observe	Recognize	Identify
2.8~12mm(W)	43m(141ft)	17m(56ft)	8m(28ft)	4m(14 ft)
2.8~12mm(T)	132m(432ft)	52m(173ft)	26m(86ft)	13m(43ft)
Functions				
Remote Monitoring	Web browser/NVR/NVMS2.X/Mobile APP			
Web Browser	Chrome 89.0+/Edge 89.0+/Firefox 87.0+/Safari 14.0+			
Online Connection	Support simultaneous monitoring for up to 6 users; Support multi-stream real time transmission			
Network Protocol	UDP, IPv4, IPv6, DHCP, NTP, RTSP, RTP, RTCP, PPPoE, DDNS, SMTP, FTP, 802.1x, SNMP v1/v2/v3, UPnP, RTMP, HTTP, HTTPS, HTTP POST, P2P, QoS			
Interface Protocol	ONVIF			
Storage	Network remote storage; micro SD card storage			
Smart Alarm	Motion detection, SMD, SD card full, SD card error, IP address conflict, cable disconnection, video exception (scene change, video blur and abnormal color detection)			
Smart Event	Line crossing/region intrusion detection(human/motor vehicle/non-motor vehicle classification), abandoned/missing object detection			
General Function	Watermark, IP address filtering, video mask, heartbeat, smart IR, corridor pattern, ANR, cloud upgrade			
Security	Video encryption, firmware encryption, HTTPS encryption, configuration encryption, illegal login lock, IP address filtering, 802.1x authentication, basic and digest authentication for HTTP/RTSP			
PoE	Yes			
IR Distance	30 ~ 50 m			
Weather Protection	IP67 Protection from dust and water			
Others				
Power Supply	DC12V/PoE			
Power Consumption	< 8.5W			
Operating Environment	-30 °C~60 °C (-22°F~140°F);Humidity: less than 95 % (non-condensing)			
Storage Environment	-30 °C~65°C (-22°F~149°F), Humidity: less than 95 % (non-condensing)			
Dimensions (mm)	218.1×70.4×80.3			
Weight (net)	Approx. 0.66KG			
Installation	Ceiling mounting; Wall mounting			
Certificate	EMC: CE/EN 55032:2015+A11:2020 EN 55035:2017+A11:2020 Safety: IEC 62368-1:2020+A11:2020 RoHS: 2011/65/EU			
Environmental Protection	Complies with Directive EU RoHS, WEEE(2012/19/EU) , directive 94/62/EC and REACH(EC1907/2006)			